

## LED EMERGENCY BALLAST

1300 Lumens

### Description:

The VEM1300DV-L, LED emergency ballast works in conjunction with the AC ballast to allow the same fluorescent fixture to be used for both normal and emergency operations. When AC power fails, the VEM1300DV-L switches to emergency mode and keeps the lamp(s) illuminated at a reduced lumen output for a minimum of 90 minutes. The VEM1300DV-L is suitable for use in new fixtures or retrofit applications. Includes LED charging indicator light, single-pole test switch, and installation hardware.

### Electrical:

- Dual voltage (120/277V)
- Compatible with most electronic AC ballasts
- Maintenance-free, long-life, high temperature Ni-Cad battery

### Installation:

- For use with switched or unswitched fixtures
- Does not affect normal operation
- May be installed in the wireway or on top of fixture
- Emergency ballast must be fed from the same branch circuit as the AC ballast housing:


### Housing:

- Durable, heavy duty steel housing in painted white finish
- Low-profile design fits most fluorescent fixtures

### Warranty:

- 5 years
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes

### Case Dimensions:

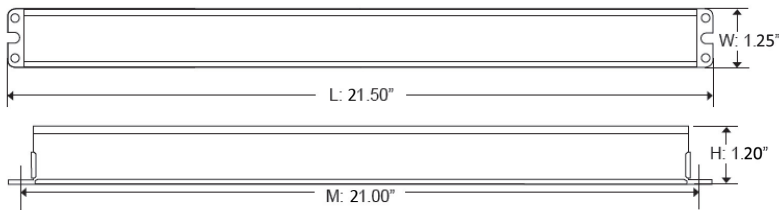

### Model: VEM1300DV-L

Operates 1-lamp 2'-8' or 2-lamp 2'-4' Single, Bi-pin, T8, T10, T12, U-bent or circline, Rapid or Instant Start  
End-of-lamp-life compatible  
Operates with 1 or 2 lamp of RetroFlex T5 or T8  
End-of-lamp-life compatible

### Technical Specifications

#### Input Voltage

120-277

#### Lamp Operated

- 1-lamp 2'- 8' single, T8, T10, T12 U-bent or circline, Rapid or Instant Start
- 2-lamp 2'- 4' single, T8, T10, T12 U-bent or circline, Rapid or Instant Start
- 1 - lamp 2'- 8' single, RetroFlex T5 or T8
- 2 - lamp 2' - 4' of RetroFlex T5 or T8

#### Emergency Operation

90

#### Initial Illumination

1-lamp: 1300 lumens  
2-lamp: 1300 lumens

#### Operating Temperature

0 - 50C

#### Battery

24 hr recharge, 7 - 10 yr life expectancy, Nickel Cadmium

#### Approval

UL and cUL listed

[User Manual](#)

[PDF](#)